DILLON CONSTRUCTION FASTENERS

www.constructionfasteners.com.au

DEWALT

D.C.F.

Dillon Construction Fasteners

YOU RING - WE BRING

(03) 9775 1514

D.C.F.

Dillon Construction Fasteners

YOU RING - WE BRING

(03) 9775 1514

LASERS

LASER DISTANCE METER 50M | Product Code DW03050-XJ

- Laser Distance Measurer (LDM) manufactured to withstand the inevitable job site drops and falls on the Job site
- It has a range of up to 50m and an accuracy of +/- 1.5mm
- Common end-user functions : Linear meter readings, surface and volume calculations. It will add or subtract readings and calculate distance in Metric and Imperial.

Voltage	Lines	Type of Laser	Indoor Visibility	Accuracy	Weight
2 x 1.5V AAA	1	Class 2	50 M	+/- 1.5mm/m	0.15 kg

DW1080 LINE LASER 10.8V GREEN - ANZ | Product Code DCE089D1G-XE

- x3 360º Self-Leveling lines • Projects bright horizontal and vertical lines
- Variable blink sequence for manual mode • Working range: 30M (60M with detector)
- IP65 debris / water resistance • Locking pendulum helps prevent damage to internal components
- Includes blow-mould case, extended ceiling bracket, 10.8v battery, charger, target card, glasses

Voltage	Lines	Type of Laser	IP Rating	Accuracy	Weight
10.8V	x3 360º	Class 2	65	+/-3mm @ 10m	4.3 kg

SELF-LEVELLING 3-LINE LASER LEVEL KIT | Product Code DW089K-XE

- Accurate to 0.3mm/m in levelling applications • Self-levelling up to 4º surface angle with automatic out-of-level indication • 3-button operation and low-battery indication • Adjustment dial for fine line movement (vertical & side) • Built-in magnetic pivot bracket mounts easily on metal surfaces
- Includes 4 AA batteries for 30 hours of run-time • Ceiling mount • Kit box

Power Supply	Beams	Indoor Visibility Range	Type of Laser	Line Accuracy	Weight
4 x AA Batteries	3	15 M	Class 2	+/-0.3 mm/m	0.8 kg

ROTATING LASER - GREEN | Product Code DCE079D1G-XE

- The DEWALT®18V MAX Green Beam Rotary Tough Laser allows users to use lasers in adverse conditions • IP67 debris / water resistance • 2 Meter Drop Rating • Highly visible green beam
- Scan Mode 15 / 45 / 90 degrees • Includes TSTAK compatible case, DCE079 Rotary Laser, detector, remote control, bracket adaptor, glasses, laser target, mounting bracket, 2.0Ah battery, charger
- Battery Life: 1.5Ah = 14hrs / 2Ah = 19hrs / 3Ah = 29hrs / 5Ah = 48hrs

Voltage	Beams	Type of Laser	IP Rating	Accuracy	Indoor Visibility	Weight
18V	3	Class 2	67	+/- 1.5mm @ 30m	76 - 600 M	0.7 kg

ROTATING LASER - RED | Product Code DCE074NR-XE

- The DEWALT® 18V MAX rotary laser has a durable design, adapters for use with tripods and brackets and allows users to use their existing power tool batteries for convenience
- 2 Meter Drop Rating • Vertical and horizontal alignments • Scan Mode 15 / 45 / 90 Degrees
- Includes TSTAK compatible case, detector, glasses, laser target, mounting bracket
- Battery Life: 1.5Ah = 17hrs / 2Ah = 22hrs / 3Ah = 33hrs / 5Ah = 56hrs

Voltage	Beam	Type of Laser	IP Rating	Accuracy	Indoor Visibility	Weight
18V	1	Class 2	54	+/- 3mm @ 30m	45 - 457 M	0.7 kg

CORDLESS TOOLS

3-MODE QUICK-CHANGE SDS+ ROTARY HAMMER | Product Code DCH254N

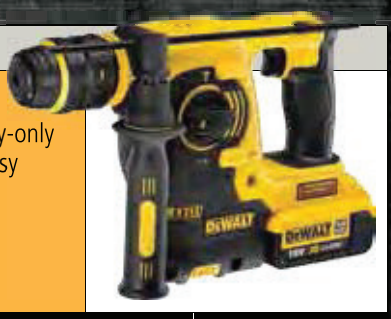

- Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 24mm
- Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary-only drilling in wood and metal • Quick-release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary-only applications
- Best in class vibration, 6.6m/s² reduces user fatigue and maximises operating periods

Applications:

- Wood Drilling to 26mm • Metal Drilling to 13mm • Concrete Drilling to 24mm

Voltage	Power Output	No-Load Speed	Blows per Minute	Impact Energy	Tool Holder	Weight
18V	400 Watts	0 - 1200 rpm	0 - 4500 bpm	2.1 Joules	SDS-Plus	3.2 kg

3-MODE BRUSHLESS SDS+ ROTARY HAMMER | Product Code DCH274N

- Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only application • Category-leading high-speed drilling performance at more than 90 holes (10mm Ø x 80mm) per charge • Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary-only drilling in wood and metal
- Perform & Protect: best-in-class vibration at 6.6m/s², minimising user fatigue

Applications:

- Wood Drilling to 26mm • Metal Drilling to 13mm • Concrete Drilling to 24mm

Voltage	Power Output	No-Load Speed	Blows per Minute	Impact Energy	Tool Holder	Weight
18V	400 Watts	0 - 1100 rpm	0 - 4600 bpm	2.1 Joules	SDS-Plus	3.3 kg

3-SPEED BRUSHLESS HAMMER DRILL DRIVER | Product Code DCD996N

- NEW automatic high-speed 38,250 bpm increases masonry drilling speed of application
- NEW 3-position LED torch, High / Medium / Low settings with high output 20min LED delay
- Tough 3-speed all-metal transmission for increased runtime and longer tool life
- Electronic clutch with 11-position adjustable torque control for optimised precision when screw driving

Applications:

- Wood Drilling to 55mm • Metal Drilling to 15mm • Masonry Drilling to 13mm

Voltage	Power Output	No-Load Speed	Beats per Minute	Max Torque	Tool Holder	Weight
18V	820 Watts	0-450/1300/2000 rpm	0-8600/25500/38250 bpm	95 Nm	Keyless Chuck	2.1 kg

2-SPEED BRUSHLESS COMPACT HAMMER DRILL DRIVER | Product Code DCD796N

- Brushless motor delivers up to 57% more runtime over brushed • Lightweight design
- Two-speed all-metal transmission for increased runtime and longer tool life • New internal design for optimal airflow, combined with the brushless motor for cool running & durability
- Super Bright LED is ~ 60 Lumens with 3-position switch Low / Med / High 20min mode
- Works with ToolConnect™ app to provide additional controls, alerts, and inventory management

Applications:

- Wood Drilling to 40mm • Metal Drilling to 13mm • Masonry Drilling to 13mm

Voltage	Power Output	No-Load Speed	Beats per Minute	Max Torque	Tool Holder	Weight
18V	460 Watts	0-550/2000 rpm	0-9350/34000 bpm	70 Nm	Keyless Chuck	1.3 kg

PERFORM PROTECT

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

CORDLESS TOOLS

3-SPEED BRUSHLESS IMPACT DRIVER | Product Code DCF887N

- Brushless motor and XR Li-Ion batteries deliver more runtime and capacity over standard units
- Application control is achieved through 3 motor speeds and torque settings including PrecisionDrive
- 1/4" (6.35mm) 'drop in' bit holder allows for quick, one handed fitment
- Compact and lightweight design to fit into tight areas (6mm shorter than the previous DCF886)
- 3x LED "Halo" light ring offers excellent workpiece lighting

Applications:

- Wood Drilling to 40mm • Metal Drilling to 13mm • Masonry Drilling to 13mm

Voltage	Power Output	No-Load Speed	Impacts per Minute	Max Torque	Tool Holder	Weight
18V	400 Watts	0-1000, 0-2800, 0-3250 rpm	0-3800 ipm	205 Nm	Drop & Load	0.94 kg

1/2" COMPACT IMPACT WRENCH | Product Code DCF880N

- Latest generation 18V XR Li-Ion compact impact wrench featuring NEW XR Li-Ion battery technology
- 1/2" (12.7mm) square socket retention for effective, efficient torque delivery
- All-metal gearing for efficient power transmission and long tool life
- Aluminium front housing provides greater heat dispersion increasing motor life
- Improved ergonomic design and rubber grip increase comfort and provide greater application control

Applications:

- Variety of fastenings in wood, metal and concrete • Iron mongery and hardware fixtures

Voltage	Power Output	No-Load Speed	Impacts per Minute	Max Torque	Bit Holder	Weight
18V	250 Watts	0-2300 rpm	0-2700 ipm	203 Nm	1/2" (12.7mm)	0.93 kg

1/2" 3-SPEED HIGH-TORQUE IMPACT WRENCH | Product Code DCF899N

- 3 speed and torque settings give you the control to best suit your application
- Up to 1625Nm of "breakaway" torque ensures removal of the tightest bolts
- Compact, lightweight design • 1/2" (13 mm) square drive with detent pin allows for more efficient torque delivery and excellent socket retention • Bright LED light
- Designed for comfort, speed control and working in dark spaces

Applications:

- Fastening small metal constructions • Automotive • Heavy machinery servicing

Voltage	Power Output	No-Load Speed	Impacts per Minute	Max Torque	Bit Holder	Weight
18V	610 Watts	0-400/1200/1900 rpm	0 - 2400 ipm	950 Nm	1/2" (12.7mm)	2.62 kg

5" ANGLE GRINDER | Product Code DCG412N

- Powerful and highly efficient PM58 DEWALT fan-cooled motor with replaceable brushes, delivers up to 7000 rotations per minute for fast cutting and grinding applications • Steel cut spiral bevel gears provide highest level of durability and low vibration, increasing user productivity
- Low profile jam-pot gear case improves gear durability and ergonomics • Intelligent trigger and lock-off switch for enhanced work safety and control

Applications:

- An efficient cordless solution for metal / masonry, cutting and grinding applications

Voltage	Power Output	No-Load Speed	Spindle Thread	Max Disc Diameter	Weight
18V	405 Watts	0 - 7000 rpm	M14	125 mm	2.2 kg

GUARANTEED TOUGH.™

3 YEAR LIMITED WARRANTY | 1 YEAR FREE SERVICE CONTRACT | 30 DAY MONEY BACK GUARANTEE

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

CORDLESS TOOLS

165mm CIRCULAR SAW | Product Code DCS391N

- Extremely durable tool design, including a cast magnesium base for repetitive, accurate cuts
- Intelligent trigger allowing total control over all applications • Keyless bevel angle and depth-of-cut adjustment with easy-to-read scale for maximum cordless versatility
- Ultra thin kerf 165mm, 24-tooth carbide-tipped blade allows for efficient runtime and fast, smooth cut finish at maximum 55mm depth of cut

Applications:

- An efficient cordless solution for wood trimming and sizing installation applications

Voltage	Blade Diameter	No-Load Speed	Number of Teeth	Cutting Depth Capacity	Bevel Cuts	Weight
18V	165 x 20 mm	3700 rpm	24	55 mm	Up to 50°	3.2 kg

140mm METAL CUTTING CIRCULAR SAW | Product Code DCS373N

- Powerful and highly efficient PM58 DEWALT fan-cooled motor with replaceable brushes delivers up to 3700 rotations per minute for fast cutting action • New transparent front guard paired with LED light and unique chemically treated glass window for enhanced line of cut visibility
- Robust cool-running 140mm, 30-tooth tungsten carbide tipped blade for burr-free cuts at constant 43mm cutting depth throughout the life of the blade

Applications:

- An efficient cordless solution for metal cutting and sizing installation applications

Voltage	Blade Diameter	No-Load Speed	Power Output	Cutting Depth Capacity	Weight
18V	140 x 20 mm	3700 rpm	460 Watts	43 mm	3.1 kg

RECIPROCATING SAW | Product Code DCS380N

- Powerful and highly efficient PM58 DEWALT fan-cooled motor with replaceable brushes, delivers fast cutting action up to 2950 strokes per minute and 28.6mm stroke length maximising user productivity
- Intelligent variable-speed trigger, lock-off switch and electronic motor brake for quick, controlled cuts and enhanced work safety • Lever-action keyless blade clamp for quick and easy blade changes • Four-position blade clamp allows for flush cutting and increased versatility

Applications:

- An efficient cordless solution for wood & metal installation trimming and demolition cutting applications

Voltage	Power Output	No-Load Stroke Rate	Stroke Length	Weight
18V	560 Watts	0-2950 spm	28.6 mm	2.7 kg

COMPACT RECIPROCATING SAW | Product Code DCS387N

- Compact saw allows better access to hard-to-reach cuts
- Improved balance and ease of handling due to central motor position
- Four-position blade clamp allows for flush cutting and improved versatility
- Lever action keyless blade clamp for tool-free blade change
- LED for improved visibility of cut

Applications:

- An efficient cordless solution for wood & metal installation trimming and demolition cutting applications

Voltage	Power Output	No-Load Stroke Rate	Stroke Length	Weight
18V	610 Watts	0 - 2900 spm	28.6 mm	2.3 kg

PERFORM PROTECT

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

CORDLESS TOOLS

COLLATED DRYWALL SCREWDRIVER | Product Code DCF620KN

- Brushless screwdriver for efficient fitting of drywall - up to 6000 screws per charge • Tool-free depth control and fine depth control • Also supplied with locking nose cone so that you can work with the same tool on sites where collated screws are not supplied • Trigger lock 'on' lets you work without having to pull the trigger • Rotating detachable screw magazine • Ergonomically designed rubber grip • Diagnostics with bright LED indicator communicates battery charge status

Applications:

- Drywall to metal studs • Drywall to timber studs

Voltage	Power Output	No-Load Speed	Max Torque	Screw Length	Weight
18V	435 Watts	0-4400 rpm	5 - 30 Nm	25 - 57 mm	1.48 kg

JIGSAW | Product Code DCS331N

- Powerful and highly efficient DEWALT PM50 fan-cooled motor with replaceable brushes delivers fast-cutting action up to 3000 strokes per minute maximising user productivity • Bevel capacity 45°
- Intelligent variable-speed trigger and lock-off switch for quick controlled cuts and enhanced work safety • Patented anti-vibration counter-balance mechanism and rubber grip providing a smooth operation • 3-position pendulum action controls the aggressiveness or smoothness of cuts

Applications:

- An efficient cordless solution for cutting wood, metal and plastics

Voltage	Power Output	No-Load Stroke Rate	Stroke Length	Max Cut - Wood	Max Cut - Steel	Weight
18V	400 Watts	0 - 3000 spm	26 mm	135 mm	10 mm	2.4 kg

2-SPEED BRUSHLESS FRAMING NAILER | Product Code DCN692N

- Brushless motor technology and 5.0Ah battery pack provides extreme runtime and extended tool life
- Fires nails up to 90mm in softwood and 63mm in hardwood • 2-Speed firing / Power Modes (bump or sequential - user selective) • Can be used with 30° to 34° clipped and round offset head paper tape collated nails from a variety of brands • Nail Lengths: 50mm - 90mm / Shank Diameters: 2.8mm - 3.3mm Shank Types: Smooth and Ring • Nailer is short enough to be operated between 400mm studs

Applications:

- Stud wall installation • Roofing • Joist installation • Floor board installation • Decking • Fencing

Voltage	Impact Energy	Nail Length	Nail Diameter	Magazine Angle	Weight
18V	105 Joules	50 - 90 mm	2.8 - 3.3 mm	30 - 34°	4.1 kg

16Ga BRUSHLESS SECOND FIX NAILER | Product Code DCN660N

- Brushless motor offers runtime that cannot be beaten in a compact package • Sequential mode allows for precision placement and bump operating mode speed of up to 4 nails per second
- Compact, lightweight and ergonomic design makes the tool easy and comfortable to use but durable enough for worksite environment • Ideal for 2nd fix applications • Tool-free depth adjust and jam clear
- Fires 16 gauge 32-63mm nails • Magazine Capacity: 110 Nails

Applications:

- Skirting boards • Door and window trim • Panelling • Casing • Cabinetry • Cap and shoe moulding

Voltage	Gauge	Nail Length	Magazine Angle	Weight
18V	16 Ga	32 - 63 mm	20°	2.35 kg

GUARANTEED TOUGH™

3 YEAR LIMITED WARRANTY | 1 YEAR FREE SERVICE CONTRACT | 30 DAY MONEY BACK GUARANTEE

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

COMPACT JOBSITE BLOWER | Product Code DCV100N

- Compact and lightweight blower for jobsite clean-up
- Variable speed slider switch with variable speed trigger for improved control
- Inflator / deflator attachments for versatile applications • Reversible transmission with lock-on / off switch
- Up to 18 minutes runtime on maximum speed. Up to 60 minutes runtime on low speed (5.0Ah pack)

Voltage	Power Output	Fan Speed	Air Throughput	Air Speed	Weight
18V	265 Watts	18000 rpm	2.8 m^3/min	80 m/s	1.3 kg

7.5L CORDED / CORDLESS WET-DRY VACUUM | Product Code DCV584N-LE

- Operates on 14.4V / 18V / 54V XR battery packs & mains supply • Vacuums wet or dry without the need to change the filter • Extremely robust and versatile machine benefits from having a highly efficient washable / replaceable HEPA filter that traps 99.97% of dust as fine as 0.3 Microns
- On-board 2M hose, cord and integrated accessory storage for ease of transport and storage
- One-hand switch and carry for increased versatility and ease of use

Voltage	Power Output	Air Flow	Tank Capacity	Blower	Hose Diameter	Weight
18V	300 Watts	954 L/min	7.5 L	Yes	32 mm	4.8 kg

1.9L HAND-HELD WET-DRY VACUUM | Product Code DCV517N-XJ

- Integrated high-performance washable filter for wet and dry applications traps 99.7% of dust
- Ideal for vacuuming hard-to-reach areas such as cornered workbenches • 1M detachable hose provides flexibility suiting a large range of cleaning applications • Detachable single-latch container for fast emptying • Gripped handle for comfort • Built-in "gulper" nozzle
- 1.9L wet & dry tank capacity can clear large amounts of material

Voltage	Power Output	Air Flow	Tank Capacity	Hose Diameter	Weight
18V	180 Watts	15.9 L/sec	1.9 L	32 mm	2.2 kg

BATTERIES & CHARGERS

5.0Ah BLUETOOTH BATTERY | Product Code DCB184B-XE

- New 18V 5.0Ah XR Li-Ion battery pack delivers 66% more runtime than a standard 3.0Ah battery pack
- Security, inventory check and customisation of your battery through Tool Connect Apple and Android App

5.0Ah BATTERY | Product Code DCB184X-XE

- Excellent electrical characteristics
- No memory effect
- New DEWALT 5.0Ah XR Li-Ion battery packs delivers 66% more runtime than a standard 3.0Ah battery pack

54V 6.0Ah BATTERY | Product Code DCB546-XE

- 6.0Ah XR FLEXVOLT Battery
- Voltage steps up to 54V to deliver unprecedented power
- Compatible with all 18V XR and 54V XR FLEXVOLT tools
- Compatible with all 18V XR chargers

54V 9.0Ah BATTERY | Product Code DCB547-XE

- 9.0Ah XR FLEXVOLT Battery
- Voltage steps up to 54V to deliver unprecedented power
- Compatible with all 18V XR and 54V XR FLEXVOLT tools
- Compatible with all 18V XR chargers

XR FAST CHARGER | Product Code DCB118-XE

- Charges both 18V and 54V batteries. The charge time for a 6.0Ah battery is 60 mins

XR DUAL PORT CHARGER | Product Code DCB132-XE

Charges 2 batteries simultaneously - 10.8V, 18V and / or 54V

DEWALT

XR FLEX VOLT



POWER OF CORDED | FREEDOM OF CORDLESS

CORDLESS, HEAVY-DUTY CONSTRUCTION POWER TOOLS

XR FLEXVOLT™ HIGH-POWER SDS-PLUS ROTARY HAMMER | Product Code DCH333NT-XJ

- Category-leading high-speed drilling performance at more than 66 holes (18mm Ø x 80mm) per charge
- Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary-only drilling in wood and metal
- Brushless motor for extreme runtime and reduced maintenance
- Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 30mm

Voltage	No Load Speed	Impact Energy	Blows per Minute	Max Drilling Capacity			Weight
54V	0 - 1000 rpm	3.5 Joules	0 - 4480 bpm	Concrete - 30 mm	Wood - 30 mm	Metal - 13 mm	3.7 kg

XR FLEXVOLT™ BRUSHLESS SDS-MAX ROTARY HAMMER | Product Code DCH481N-XE

- True corded performance
- Anti-rotation system detects a loss of tool control and reacts by instantly cutting the power
- Rotation-stop mode for chiselling and impact stop mode for rotary-only drilling with dry diamond cores
- Low vibration at 9.4m/s², minimising user fatigue
- Brushless motor for improved runtime and reduced maintenance

Voltage	No Load Speed	Impact Energy	Blows per Minute	Max Drilling	Weight
54V	0 - 540 rpm	6.1 Joules	0 - 3150 bpm	Concrete - 40 mm	5.4 kg

XR FLEXVOLT™ PLUNGE SAW | Product Code DCS520NT-XJ

- Parallel plunge allows the user to maintain a smooth and constant hand position while cutting
- 42-tooth blade gives a fine and accurate finish with very little breakout in laminates • Variable speed allows the correct speed to be set for different types of materials • Anti-kickback function stops the saw from moving backwards along the rail • Enclosed guard gives 90% dust extraction capability

Applications:

- Fitting kitchen worktop, sink, hob cut-outs and doors • Cutting plastics, fibreglass, MDF and plywood

Voltage	No Load Speed	Blade Diameter	Blade Bore	Bevel Capacity	Max Depth of Cut (with guide rails)		Weight
54V	2500 - 4200 rpm	165 mm	20 mm	47°	90° - 59 mm	45° - 44 mm	4.7 kg

XR FLEXVOLT™ CIRCULAR SAW | Product Code DCS575N-XE

- Achieves an output of 1300W and a run-speed of up to 5800rpm, resulting in faster cuts
- Airlock compatibility for superior dust management
- On board quick depth and quick bevel adjustment minimises downtime
- LED illumination, cutaway guard and dust blower ensure excellent cut visibility

Applications:

- Ripping sheet material • Cutting large diameter timber over 67mm • General construction

Voltage	Speed	Blade Diameter	Blade Bore	Bevel Capacity	Max Depth of Cut		Weight
54V	5800 rpm	184mm	20mm	57°	90° - 67 mm	45° - 49 mm	3.6 kg

XR FLEXVOLT™ 125mm ANGLE GRINDER | Product Code DCG414N-XJ

- Enhanced battery runtime combined with DEWALT's highly efficient 54V brushless motor allows for longer duration applications • Safety Brake: Less than 2.0 seconds • Electronic clutch reduces kickback reaction in the event of a pinch or stall • 2-position side handle offers greater safety and control
- Up to 126 cuts of 12mm reinforcing bar, up to 42 cuts of 20mm reinforcing bar, up to 402 cuts / 86m of SL72 reinforcing mesh

Voltage	Speed	Spindle Thread	Max Disc Diameter	Weight
54V	9000 rpm	M14	125 mm	2.2 kg

3 YEAR LIMITED WARRANTY | 1 YEAR FREE SERVICE CONTRACT | 30 DAY MONEY BACK GUARANTEE

GUARANTEED TOUGH.™

PERFORM PROTECT

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

DEWALT XR FLEXVOLT

XR FLEXVOLT™ 216mm MITRE SAW | Product Code DCS777

- Power of a corded saw with the portability of a cordless saw • XPS shadow line cut indicator provides fast accurate alignment of the blade while illuminating the work piece for increased productivity
- Up to 331 cuts of 90mm x 35mm structural pine, up to 90 cuts of 200mm x 50mm treated pine sleeper
- Integrated positive mitre stops at 15°, 22.5°, 30°, 45°, quick-release mitre mechanism up to 50°
- Air-Lock compatible dust extractor • Sliding left hand fence with measuring scale

Voltage	Blade Diameter	Blade Bore	Blade Speed	Bevel Capacity	Mitre Capacity	Max Cut Depth	Weight
54V	216 mm	30 mm	6300 rpm	48°	50 / 50°	80 mm	14 kg

XR FLEXVOLT™ 305mm DOUBLE BEVEL SLIDING COMPOUND MITRE SAW | Product Code DWS780

- Outstanding cutting performance in both small profiles and large construction timbers up to 110 x 303mm
- XPS shadow line cut indicator provides fast accurate alignment of the blade while illuminating the work piece for increased productivity- no adjustment required • Simple setting of bevel angles up to 49° left and right • Cam action mitre lock allows the user to quickly adjust angles between 0° - 50° left and 0° - 60° right • Linear horizontal rails allow cutting materials up to 345mm wide

Voltage	Blade Diameter	Blade Bore	Blade Speed	Bevel Capacity	Mitre Capacity	Max Cut Depth	Weight
54V	305 mm	25.4 mm	3800 rpm	49 / 49°	60 / 50°	170 mm	24.8 kg

XR FLEXVOLT™ 295mm ALLIGATOR SAW | Product Code DCS396

- Ideal for cutting through hollow clay blocks, aerated concrete, timber and insulation materials
- Features two durable blades with a thicker sword for reduced deflection and a more accurate cut
- Integrated blade clamp enables the entire sword to pass through the substrate with ease
- Sturdy aluminium gearcase housing reduces weight and provides excellent durability
- Ultra low vibration 4.1m/s^2, up to 50 cuts of 200mm x 50mm treated pine sleeper

Voltage	No Load Stroke Rate	Blade Length	Stroke Length	Length	Height	Weight
54V	2400 spm	29.5 mm	40 mm	775 mm	219 mm	5.5 kg

XR FLEXVOLT™ TABLESAW | Product Code DCS7485

- Introducing the world's first cordless table saw from DEWALT • Lightweight, compact and easy to move
- Highly accurate rack & pinion adjustable fence system • Cuts 92 metres of 19mm OSB on a single charge • Cuts up to 83M of 19mm plywood, up to 110M of hardwood veneer laminate flooring and up to 75M of 16mm melamine • Site-tough steel roll cage

Applications:

- Fitting solid wood flooring and decks • Concrete form work • Sizing timber for joinery

Voltage	Blade Diameter	Blade Bore	Blade Speed	Bevel Capacity	Max Rip Capacity (Right)	Max Rip Capacity (Left)
54V	210 mm	30 mm	5800 rpm	-3° to 48°	610 mm	318 mm

Max Depth Cut at 90°	Max Depth Cut at 45°	Table Size	Depth	Length	Height	Weight
65 mm	45 mm	485 x 485 mm	605 mm	605 mm	330 mm	21.5 kg

XR FLEXVOLT™ RECIPROCATING SAW | Product Code DCS388

- Class-leading, low-vibration (12.5m/s^2) reciprocating saw • Well-balanced with an ergonomic body grip and back handle • Tool-free blade change • Two-position blade clamp allows for flush cutting and increased versatility • Up to 157 cuts 90mm x 35mm of structural pine, up to 497 cuts of 100mm x 100mm PVC waste pipe

Applications:

- An efficient cordless solution for wood and metal installation trimming and demolition

Voltage	No-Load Stroke Rate	Stroke Length	Max Cutting Capacity			Weight
54V	0 - 3000 spm	28.6 mm	Wood - 300 mm	Steel Sections & Pipes - 130 mm	PVC - 160 mm	3.6 kg

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

DEWALT

XR EXTREME RUNTIME **HIGH-EFFICIENCY ACCESSORIES** extend the DEWALT Power Tool platform with a stand-alone product range

CUTTING & GRINDING

CIRCULAR SAW BLADES

Sub Micron Grade Carbide Tips	Patented Body Slots	ATB+R Grind	Optimised Hook Angle	Optimised Face Sheer
Long Life	Low Vibration	Cut Quality & Efficiency	Low Cutting Force	Fast Cuts Smooth Efficient Cuts

Sizes and Product Details available at www.dewalt.com.au

Optimised for DCS575

36T Blade

TABLE SAW BLADES

Sub Micron Grade Carbide Tips	Patented Body Slots	ATB+R Grind	Optimised Hook Angle	Optimised Face Sheer
Long Life	Low Vibration	Cut Quality & Efficiency	Low Cutting Force	Fast Cuts Smooth Efficient Cuts

Sizes and Product Details available at www.dewalt.com.au

Optimised for DCS7485

24T Blade

MITRE SAW BLADES

Sub Micron Grade Carbide Tips	Patented Body Slots	ATB+R Grind	Optimised Hook Angle	Optimised Face Sheer
Long Life	Low Vibration	Cut Quality & Efficiency	Low Cutting Force	Fast Cuts Smooth Efficient Cuts

Sizes and Product Details available at www.dewalt.com.au

Optimised for DCS777

36T Blade

RECIPROCATING SAW BLADES

14 /18 and 4 / 6 Tooth Pattern	Tough Coat® Finish	High-Speed Steel Teeth
Fast Cuts	Helps Reduce Heat Buildup	Long Life & Durability

152mm Metal Blade

152mm Wood & Nails Blade

Optimised for DCS388

Sizes and Product Details available at www.dewalt.com.au

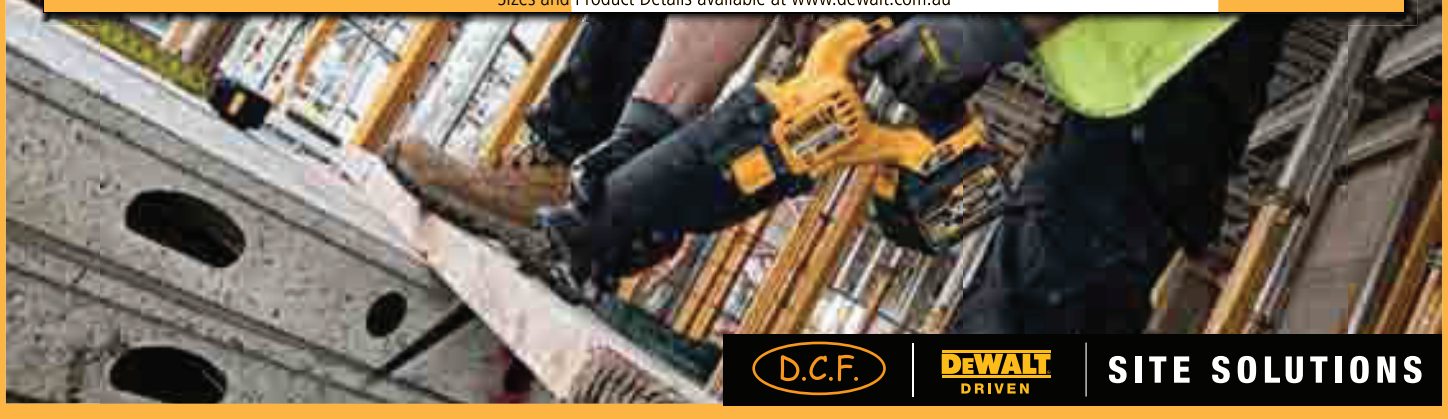

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

DEWALT

XR EXTREME RUNTIME

CUTTING & GRINDING

CUTTING DISCS

High Performance Ceramic Grain

Tough and durable. Many cutting edges. Stays sharper longer for fast cuts.

High Density Grain Concentration

For fast cutting and low heat build-up

Sizes and Product Details available at www.dewalt.com.au

Optimised for DCG414

125mm x 1.1 x 22.23mm

GRINDING DISCS

High Performance Ceramic Grain

Tough and durable. Many cutting edges. Stays sharper longer for fast cuts.



High Density Grain Concentration

For fast cutting and low heat build-up

Sizes and Product Details available at www.dewalt.com.au

Optimised for DCG414

125mm x 3.0 x 22.23mm

FLAP DISCS

High Performance Ceramic Grain

Tough and durable. Many cutting edges. Stays sharper longer for fast cuts.

High Density Grain Concentration

For fast cutting and low heat build-up

Sizes and Product Details available at www.dewalt.com.au

Optimised for DCG414

60G 125mm x 22.23mm

ALLIGATOR SAW BLADES

HSS Wood Blade
Fast cutting of Softwood, Hardwood, Hardboard, Plasterboard and Fibreboard

TCT Low Density Building Block Blade
Rapid cutting of low density thermal building blocks up to 12N/mm² such as aerated concrete (Hebel®)

XR 295mm Wood Blade

XR 295mm Poroton Blade

Optimised for DCS396

Sizes and Product Details available at www.dewalt.com.au

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

CORDED GRINDERS

ANGLE GRINDER 230mm (9”) (FULLY FEATURED) | Product Code DWE4599N-XE

- Autobalancer gives low vibration (4.5m/s^2 triaxially) resulting in greater end-user comfort and protection • Torque-limiting electronic clutch reduces the maximum torque reaction transmitted to the operator if the disc jams and prevents the disc from ‘locking on’
- Overload protection will prevent the motor overheating by shutting off the unit until the unit cools down • Dust Ejection System protects from abrasion damage increasing the life of the tool • Spindle lock for quick wheel changes

Voltage	Power Output	No-Load Speed	Spindle Thread	Max Disc Diameter	Weight
240V	2400 Watts	6500 rpm	M14	230 mm	6.2 kg

ANGLE GRINDER 125mm (5”) | Product Code DWE4257-XE

- Electronic variable speed control • Electro-mechanical clutch reduces the “kickback” transmitted to the operator if the cutting disc jams • Anti-vibration side handle
- Dust Ejection System protects from abrasion damage increasing the life of the tool
- Overload protection will prevent the motor overheating by shutting off until the unit cools down • Soft start to limit start-up current and reduce kick back • No-volt release switch will prevent the unit starting when plugged in, even if the switch is in the on position - switch must be consciously reset before power is delivered

Voltage	Power Input	No-Load Speed	Spindle Thread	Max Disc Diameter	Weight
240V	1500 Watts	2800 - 10000 rpm	M14	125 mm	2.6 kg

ANGLE GRINDER 180mm (7”) (FULLY FEATURED) | Product Code DWE4597N-XE

- Torque-limiting electronic clutch reduces the maximum torque reaction transmitted to the operator if the disc jams • Dust Ejection System protects from abrasion damage increasing the life of the tool • Overload protection will prevent the motor overheating by shutting off until the unit cools down • Soft-start to limit start-up current and reduce kick back
- No-volt release switch prevents the unit starting when plugged in, even if the switch is on position - switch must consciously reset before power is delivered

Voltage	Power Output	No-Load Speed	Spindle Thread	Max Disc Diameter	Weight
240V	2400 Watts	8500 rpm	M14	180 mm	5.6 kg

DEWALT

COMBIHAMMERS

4KG SDS-PLUS COMBINATION HAMMER with QCC | Product Code D25414KT-XE

- Active vibration control with floating back handle delivers extremely low vibration and more comfort • Quick-change 3-jawed chuck provides speed, precision and flexibility when drilling in wood, ceramic and steel • Rotation-stop for light chiselling applications, render and tile removal • Ideal for drilling large anchor, fixing and through holes in concrete and masonry from 6 to 32mm in diameter • Electronic variable speed switch
- Impact-stop for drilling in wood, ceramic, steel and screwdriving applications

Includes:

- Quick-release SDS+ removable tool holder / Quick-release 3 jaw removable chuck / Multi-position side handle / Heavy duty carrying case / SDS+ Chisel / 2 x SDS+ drill bits / 4 x HSS drill bits / 4 x brad point wood drill bits / 2 x flatwood drill bits / Safety glasses / Gloves

Voltage	Power Output	Max Drilling Capacity			Blows per Minute	Impact Energy	Weight
240V	450 Watts	Concrete - 32 mm	Wood - 32 mm	Metal - 13 mm	0 - 4700 bpm	4.2 Joules	4.3 kg

5KG SDS-MAX COMBINATION HAMMER | Product Code D25481K-XE

- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 40mm in diameter - core drilling up to 100mm
- Ergonomic, compact and slim-line design maximises control and offers easy access to confined spaces
- Rotation stop mode for chiselling and impact stop mode for rotary only drilling with dry diamond cores
- Low vibration at 9.4m/s² minimises user fatigue • Multi-position side handle

Voltage	Power Input	Load Speed	Max Drilling Capacity	Blows per Minute	Impact Energy	Weight
240V	1050 Watts	540 rpm	Concrete - 40 mm	0 - 3150 bpm	6.1 Joules	5.9 kg

6KG SDS-MAX COMBINATION HAMMER | Product Code D25601K-XE

- Excellent power to weight ratio: 8 Joules of impact energy delivered by a 6.8kg hammer
- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 45mm in diameter - core drilling up to 100mm • Chain drive improves durability and increases efficiency together with an oil-filled gearbox to ensure total component lubrication and superior heat dissipation
- Active Vibration Control system incorporates a floating rear handle and damped side handle to reduce vibration • Lock-on switch for greater control when in chipping mode

Voltage	Power Output	Load Speed	Max Drill Hole	Blows per Minute	Impact Energy	Tool Holder	Weight
240V	615 Watts	210 - 415 rpm	45 mm	1430 - 2840 bpm	8 Joules	SDS-Max	6.8 kg

7KG SDS-MAX COMBINATION HAMMER | Product Code D25722K-XE

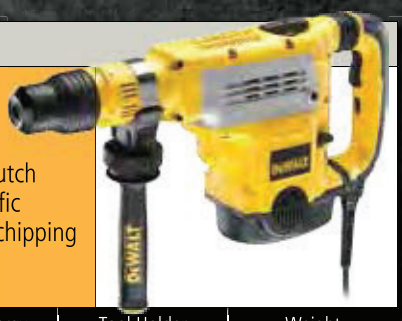

- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 48mm in diameter - core drilling up to 125mm • Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration • Patented 2-stage clutch allows the user to change the clutch level from low to high torque, to optimise the tool for specific drilling applications • Electronic variable speed and impact energy control • Lock-on switch for chipping
- Rotation-stop for demolition applications in brick, masonry and light chasing in concrete

Voltage	Power Output	Load Speed	Max Drill Hole	Blows per Minute	Impact Energy	Tool Holder	Weight
240V	840 Watts	137 - 275 rpm	48 mm	1260 - 2520 bpm	11 Joules	SDS-Max	9.1 kg

COMBIHAMMERS

DRILL & HOLE CLEANING SYSTEM | Product Code DWH050K-XJ

- Ideal for dust-free drilling up to 52mm in diameter and unlimited depth
- Compatible with all professional dust extractors
- Durable rubber seal allows for adhesion to most masonry surfaces
- Interchangeable drilling heads for optimum dust removal
- Flexible hose allows for 360 degree vertical and horizontal orientation
- Includes hole cleaning nozzles to expose the full drilled depth and to ensure maximum adhesion of anchor fixings

Includes:

- Heavy duty carrying case / 2 x interchangeable drilling heads / 2 x hole cleaning nozzles

Collar Diameter	Max Drill Bit Diameter	Hose Length	Hose Diameter	Weight
0-38 mm & 38-52 mm	52 mm	90 mm	44 mm	0.6 kg

SDS-PLUS EXTRACTION TELESCOPE (Fits Dust Extractor Vac) | Product Code D25301D-XJ

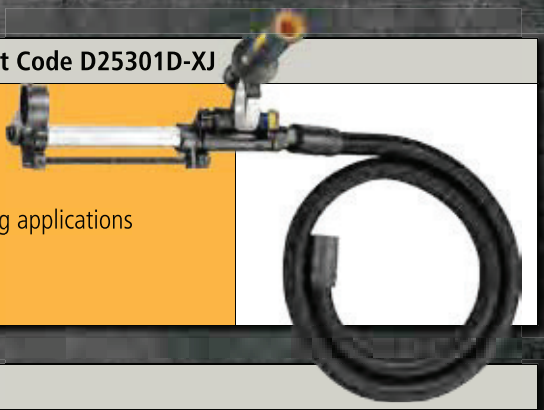

- For use with DEWALT corded and cordless SDS-Plus hammers
- Ideal for dust-free drilling up to 16mm in diameter
- Quick-fit system for easy tool-free assembly and release
- Tough, versatile and lightweight (1.2kg) to meet the needs of the most demanding applications
- 1500mm heavy duty rubber hose for maximum reach
- Collar Diameter: 43mm / 54mm

SDS-MAX & PLUS XLR Premium 4-Cutter Drill Bits

- High-quality hammer drill bit with 4-cutter X-head design for improved user comfort, reduced vibration and improved hole quality
- 4-Flute spiral with maximised flute entry increases drilling speed and debris removal

SDS-PLUS EXTREME 2-Cutter Drill Bits

- Longer life, faster drilling and greater durability • Superior carbide grade
- Optimised flute design allows efficient debris removal
- Hardened body for extra strength and reduced breakage
- New tip design ensures better bit penetration

CHISEL POINTED 300mm

- Toughened steel ensures tough bits
- Micro-processor controlled heat treatment for consistently tough, long-life chisels

CHISEL FLAT 300mm

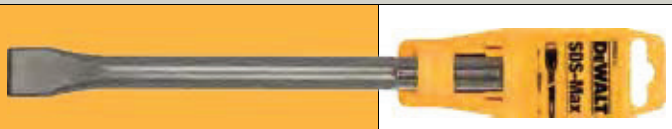

- Toughened steel ensures tough bits
- Micro-processor controlled heat treatment for consistently tough, long-life chisels

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

BREAKERS

10KG HAMMER - SDS-MAX | Product Code D25902K-XE

- Powerful and durable 1550 Watt motor delivers outstanding concrete breaking performance
- Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
- In-line design for better handling and quick-change chisel adjustment allows fast orientation of the chisel through 12 preset positions
- Magnesium housings ensure maximum durability and minimum weight
- Soft-start feature ensures accurate clean breaking without chisel walking

Voltage	Power Output	Blows Per Minute	Impact Energy	Tool Holder	Weight
240V	750 Watts	1050 - 2100 bpm	19 Joules	SDS-Max	10.5 kg

12KG HAMMER - 19mm HEX | Product Code D25941K-XE

- Powerful and durable 1600 Watt motor delivers outstanding concrete breaking performance
- Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
- In-line design for better handling and quick-change chisel adjustment allows orientation of the chisel through 12 preset positions
- Magnesium housings ensure maximum durability and minimum weight
- Soft-start feature ensures accurate clean breaking without chisel walking

Voltage	Power Output	Blows Per Minute	Impact Energy	Tool Holder	Weight
240V	790 Watts	1620 bpm	22.5 Joules	19 mm Hex	13.8 kg

16KG HAMMER - 30mm HEX | Product Code D25961K-XE

- Highest productivity due to an optimum balance of power, impact energy and vibration
- Lowest vibration in the 16kg class ensures the highest trigger time
- 50% longer service intervals than the nearest competitor for lower running costs and less down time
- Robust and proven design provides the longest lasting 16kg breaker
- Soft start feature ensures accurate clean breaking without chisel walking

Voltage	Power Output	Blows per Minute	Impact Energy	Tool Holder	Weight
240V	1000 Watts	1450 bpm	35 Joules	30 mm Hex	16.9 kg

30KG PAVEMENT BREAKER - 28mm HEX | Product Code D25980-XE

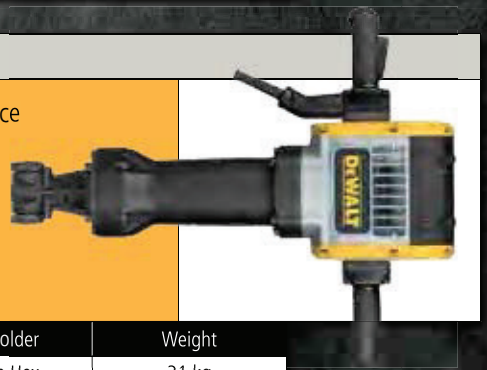

- Large oversize mechanism delivers extreme durability and excellent breaking performance
- 2000 Watt motor delivers outstanding efficiency and durability
- Active Vibration Control offers safer, more comfortable use and more productivity
- Suspended Handle System absorbs the rebound and, working with the AVC, delivers the lowest vibration on the market
- Heavy duty electronic module for constant power under load
- Easy-to-service design to reduce repairing costs

Voltage	Power Output	Blows per Minute	Impact Energy	Tool Holder	Weight
240V	986 Watts	870 bpm	43.8 Joules	28 mm Hex	31 kg

PERFORM PROTECT

GUARANTEED TOUGH™

3 YEAR LIMITED WARRANTY | 1 YEAR FREE SERVICE CONTRACT | 30 DAY MONEY BACK GUARANTEE

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

BREAKERS

LARGE HAMMER DUST EXTRACTION - CHISELLING | Product Code DWH051K-XJ

- Compatible with all DEWALT SDS-Max / 19mm HEX combination hammers and breakers
- Accepts any DEWALT pointed, flat chisels and bushing tools and can be connected to any professional dust extractor
- Quick-release and tool-free connection
- 3x different length flexible nozzles for optimum dust extraction
- Impact resistant and flexible body allows for maximum durability and long life

Includes:

- Heavy duty carrying case / 3 x interchangeable nozzles / 2 x tool holder adaptors

Max Chisel Diameter	Lengths	Height	Width	Weight
27 mm	210 mm / 282 mm / 355 mm	105 mm	173 mm	0.8 kg

LARGE HAMMER DUST EXTRACTION DEMO | Product Code DWH052K-XJ

- Compatible with all DEWALT demolition hammers and breakers
- Accepts any DEWALT pointed, flat chisels and bushing tools up to 32mm wide and can be connected to any professional dust extractor
- Fully adjustable, quick-release and tool-free connection
- Impact resistant dust nozzle and flexible hose allows for maximum durability and long life

Includes:

- Heavy duty carrying case

Max Chisel Diameter	Hose Length	Hose Diameter	Height	Width	Length	Weight
32 mm	730 mm	44 mm	105 mm	173 mm	860 mm	0.85 kg

DUST EXTRACTOR VACUUM 38L | Product Code DWV902M-XE

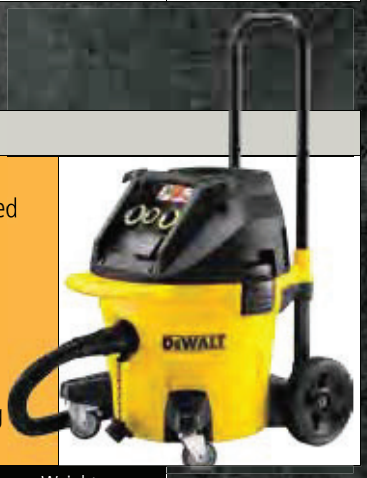

- Wet and dry pick up with variable suction control allows for the reduction of suction power if required
- Constant suction power even with the finest concrete and wood dust
- The filter is automatically cleaned every 15 seconds reducing filter clogging and delivering constant air flow • Large rear wheels • Front handle / bumper protect hose connection
- Rugged telescopic handle • Increased durability and portability
- The machine continues to run for an extra 15 seconds to allow all dust to be cleared from system

Includes:

- 4.6M x 32mm extraction hose / 35mm AirLock adapter / Stepped Rubber AirLock adapter / Dust bag

Power Input	Max Airflow	Wet / Dry Capacity	Capacity	Height	Weight
1400W	4080 L/m	18.4 L	38 L	695 mm	15 kg

PERFORM PROTECT

GUARANTEED TOUGH™

3 YEAR LIMITED WARRANTY | 1 YEAR FREE SERVICE CONTRACT | 30 DAY MONEY BACK GUARANTEE

D.C.F. | DEWALT DRIVEN | SITE SOLUTIONS

WARRANTY & SERVICE POLICY

3 YEAR LIMITED WARRANTY* *CONDITIONS APPLY

1 YEAR FREE SERVICE CONTRACT

30 DAY NO RISK SATISFACTION GUARANTEE

GUARANTEED TOUGH WARRANTY

The 3 Year Limited Warranty
is a repair warranty that applies to DEWALT branded products* in the unlikely event that the product becomes defective within 3 years of purchase due to faulty materials or workmanship. DEWALT guarantees to replace all defective parts free of charge or at discretion replace the unit. Proof of purchase required.

The 1 Year Service Contract
applies to DEWALT branded products that require maintenance or service within 12 months of purchase. DEWALT will provide 1 service free of charge, undertaken by an authorised DEWALT service agent. Proof of purchase required.

The 30 Day No Risk Satisfaction Guarantee
If not completely satisfied with the performance of the DEWALT product, it can be returned to the point of purchase within 30 days for a full refund or exchange. Proof of purchase required.

* Unless specifically excluded within the product warranty information

D.C.F.

www.constructionfasteners.com.au

(03) 9775 1514

YOU RING IT - WE BRING IT

HEAD OFFICE
Dillon Construction Fasteners
2/24 Brett Drive Carrum Downs 3201
(03) 9775 1514
(03) 9775 1003

DEWALT

EMAIL SALES
jc@dcfpl.com.au

EMAIL INFORMATION
info@dcfpl.com.au

SALES

Josh Connelly	0417 879 927
Jammie Dillon	0409 879 927
Tony Ferdinands	0400 338 825
Tim White	0407 879 927
Jeff Calder	0425 799 446
Phil Carey	0411 152 003

OFFICE MANAGER

Josh Connelly	0417 879 927

ADMINISTRATION

Sarah Speirs	03-9775 1514
Vanessa Dillon	03-9775 1514

DELIVERIES

Ray Dillon	0431 553 187
David Corby	0403 498 689
Gary Faux	0425 799 447

www.constructionfasteners.com.au